



Comparison of Multiple Bioassays to High-Resolution Gas Chromatography for Quantification of Polychlorinated Biphenyls and Dioxins/Furans in Sediment

Mandy Michalsen, John Wakeman, Kymberly Takasaki,
USACE Seattle District

Laura Inouye, Washington Department of Ecology

June 18, 2010

Funding provided by: US EPA Region 10, WA State Department of Ecology, WA State Department of Natural Resources, USACE Seattle District's Dredge Material Management Office, USACE ERDC's Dredging Operations and Technical Support Program


Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 18 JUN 2010		2. REPORT TYPE		3. DATES COVERED 00-00-2010 to 00-00-2010	
4. TITLE AND SUBTITLE Comparison of Multiple Bioassays to High-Resolution Gas Chromatography for Quantification of Polychlorinated Biphenyls and Dioxins/Furans in Sediment			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers, Seattle District, PO Box 3755, Seattle, WA, 98124-3755			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the NDIA Environment, Energy Security & Sustainability (E2S2) Symposium & Exhibition held 14-17 June 2010 in Denver, CO.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 19	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			




Dioxin in Sediment is Important, Costly Issue in the Pacific Northwest

- Dioxins are primary risk drivers in Puget Sound and are key to the Puget Sound Cleanup Initiative
- The Dredge Material Management Program has proposed revised background-based guidelines for suitability determination for in-water dredge material disposal, which likely means more sediment dioxin testing will be required
- High-Resolution Gas Chromatography/Mass Spectrometry (HRGC/MS, EPA 1613b) is “gold standard” for sediment dioxin testing but costly with long turn around times
- Bioassays have potential to provide much cheaper, quicker quantitative dioxin results for sediments but have not been evaluated for sediment in low, dredge material-relevant concentration range of 4 and 10 ppt TEQ

qPCR-Based Assay: Procept (EPA 4430)

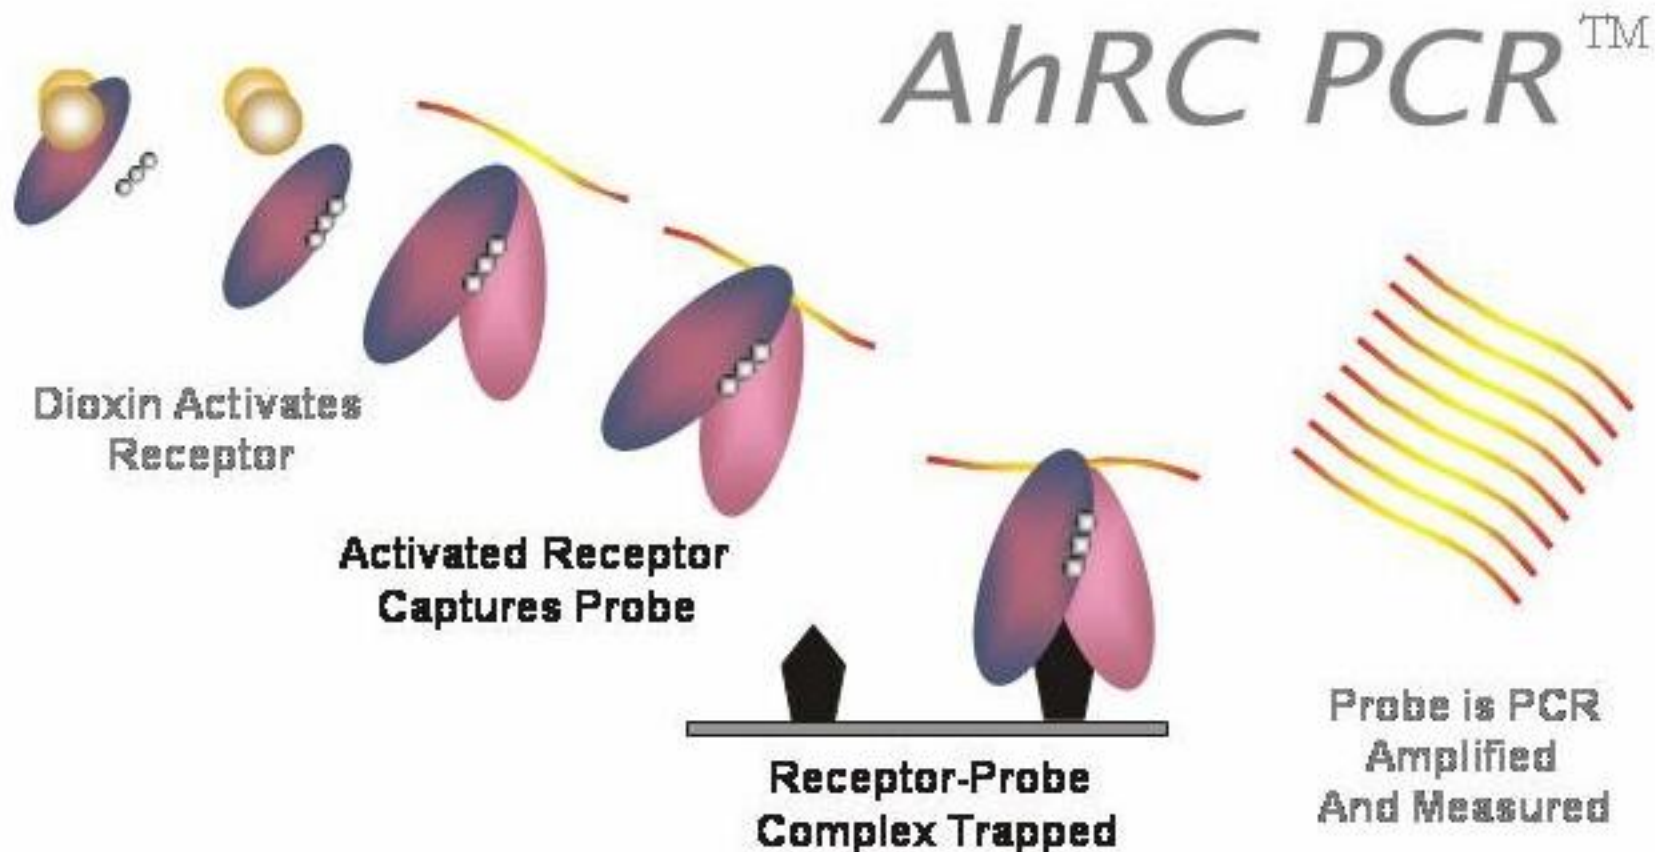

Cell-Based Assays: CALUX (EPA 4435) and 101-L

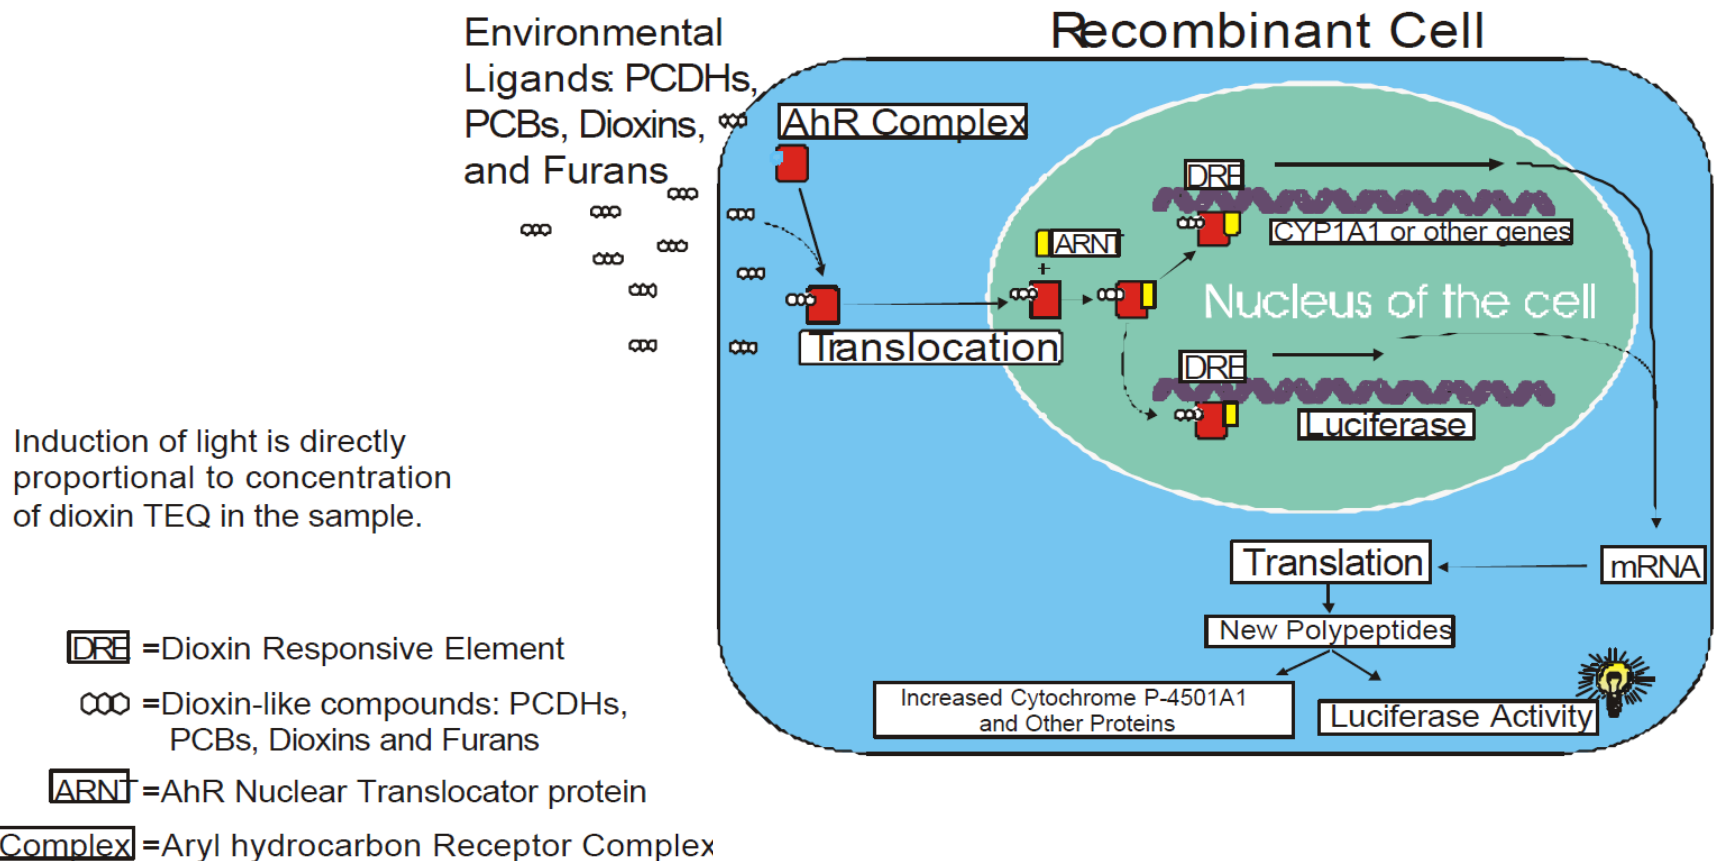




OSV Bold Research Cruise

Collective effort of multiple State and Federal Agencies to characterize non-urban influenced sediment samples throughout the sound for determination of natural background contaminant concentrations to support DMMP revised sediment management guidelines


An additional 21 urban influenced samples were retrieved from project archives and included in the data set

Sediment Sampling Methods

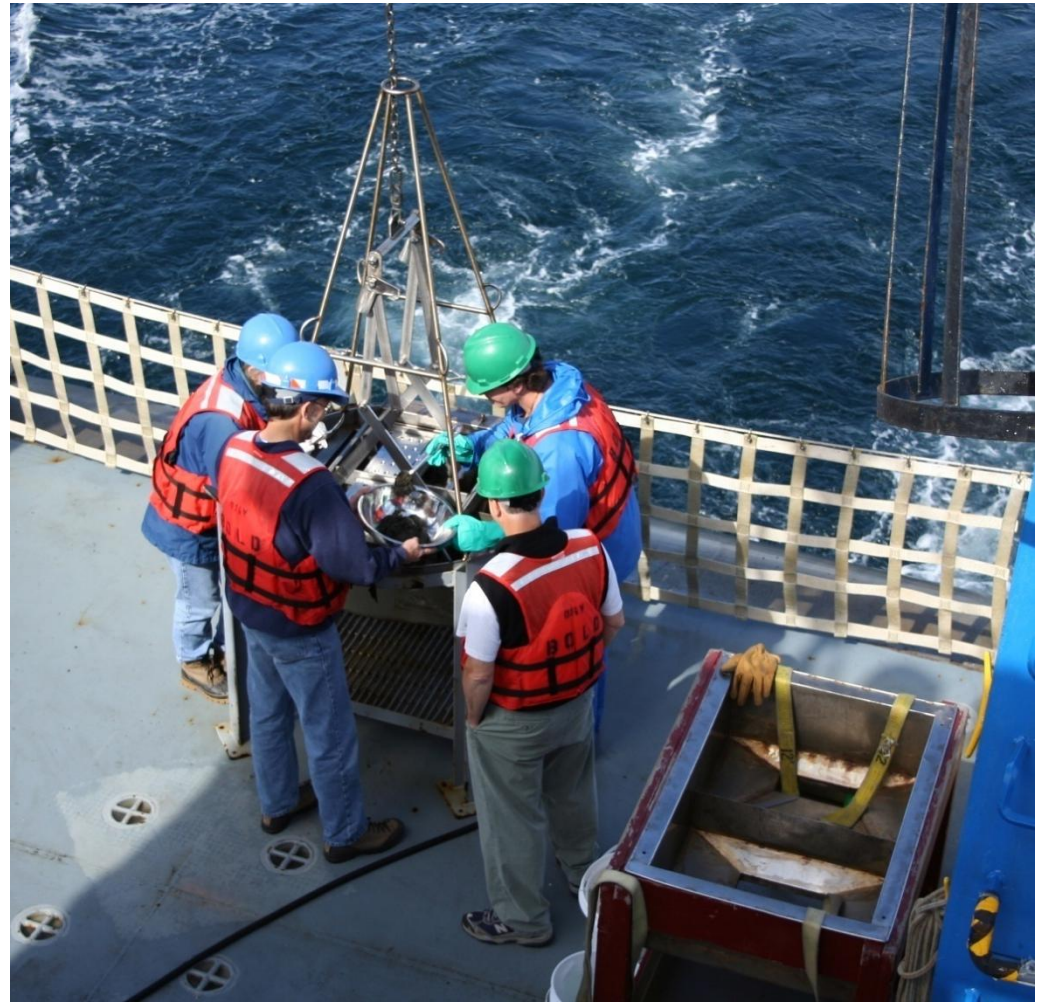



Sediment Sampling Methods

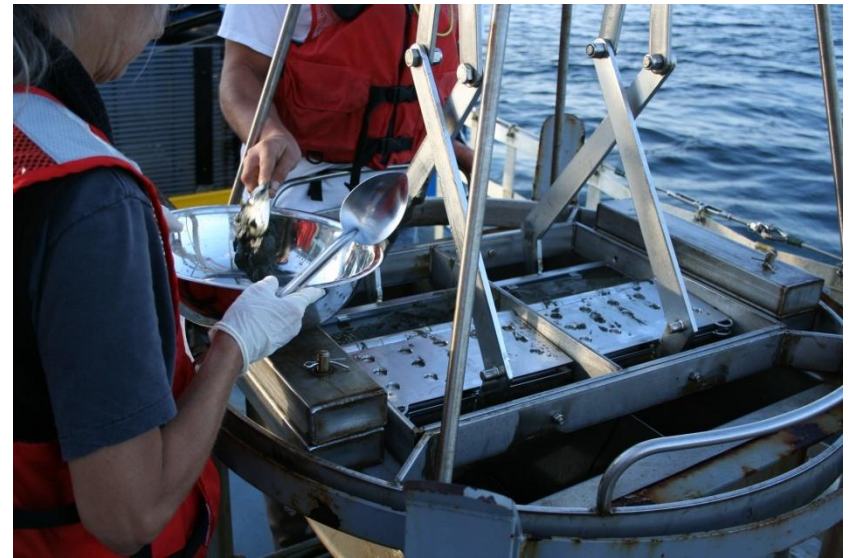

Sediment Sampling Methods





Sediment Analysis Methods

- High-Resolution Gas Chromatography/Mass Spectrometry (HRGC/MS)
 - SGS Laboratories, Wilmington, NC
- XDS-CALUX®
 - Xenobiotic Detection Systems Laboratory, Durham, North Carolina
- 101-L & Procept
 - Engineering Research & Development Center Laboratory, US Corps of Engineers, Vicksburg, MS



Bioassay vs. HRGC/MS Evaluation Methods


- Bioassay performance was evaluated against HRGC/MS by
 - Bivariate Least-Squares Regression
 - Does not assume error-free independent variable
 - Considers variances of both independent and dependant variables simultaneously
 - Sample-specific variances were estimated for HRGC/MS and bioassay results by extrapolating calibration standard variances based on sample concentrations
 - Relative percent differences
 - False positive/false negative rates




Results

	<u>HRGCMS</u>	<u>CALUX</u>	<u>101L</u>	<u>Procept</u>
min	0.0440	0.340	0.893	-0.136
max	11.6	17.0	22.6	184
Correlation coefficients		0.708	0.166	-0.162

Results

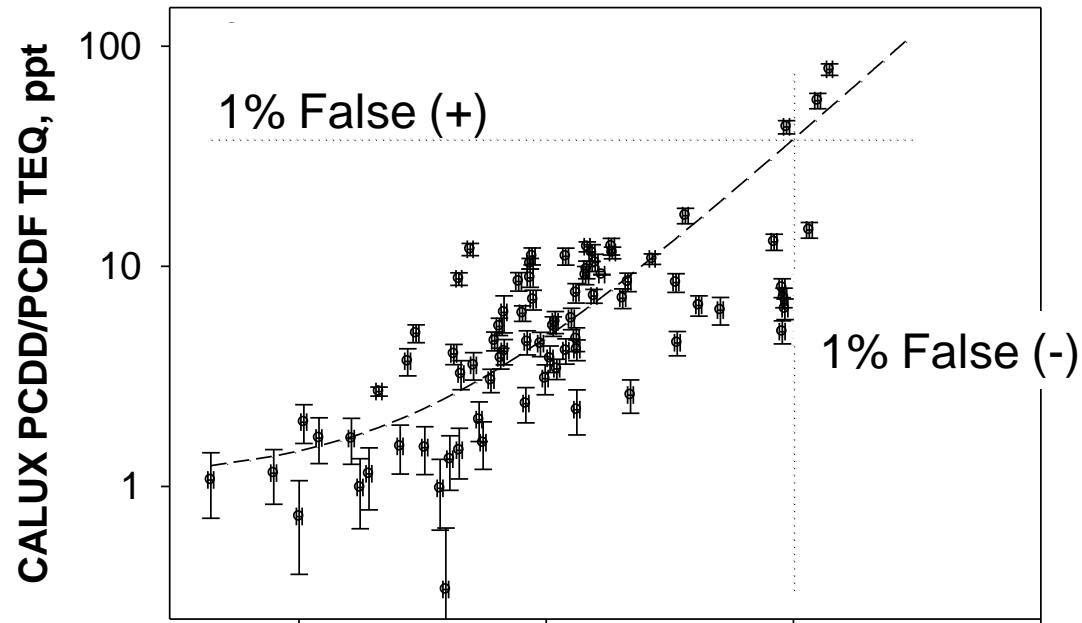


CALUX
BLS Regression Results
 $Y = 3.67x + 1.08$, $R = 0.59$

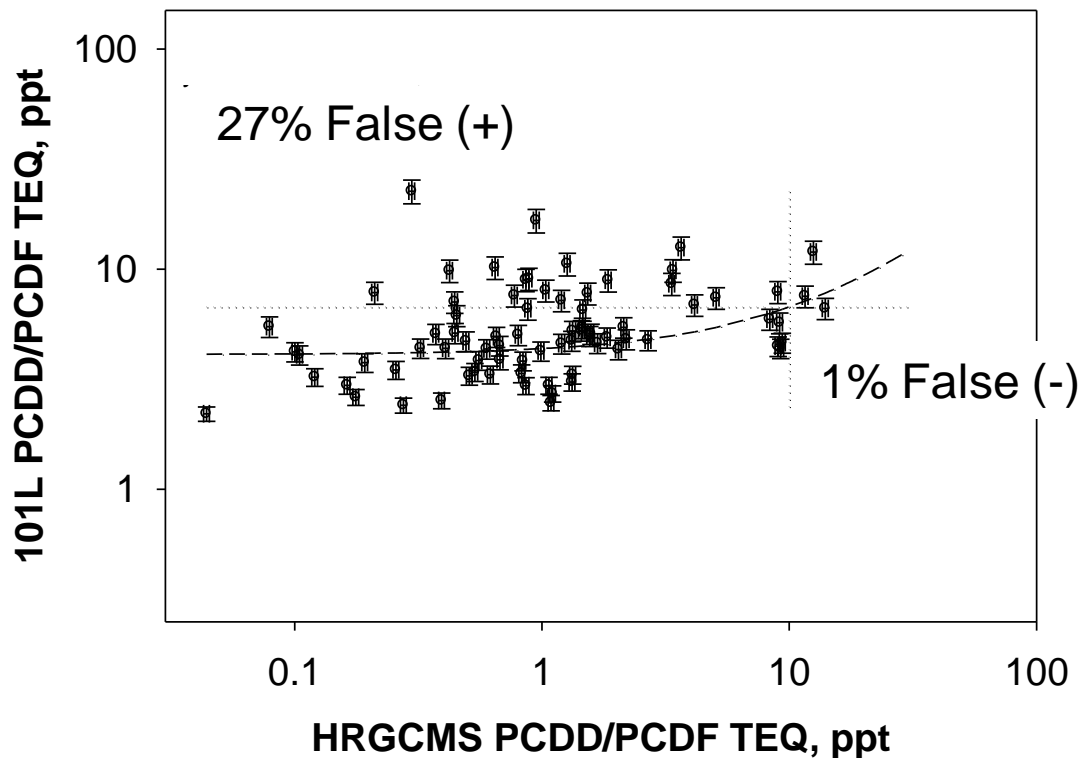


101-L
BLS Regression Results
 $Y = 0.265x + 4.09$, $R = 0.02$

Results

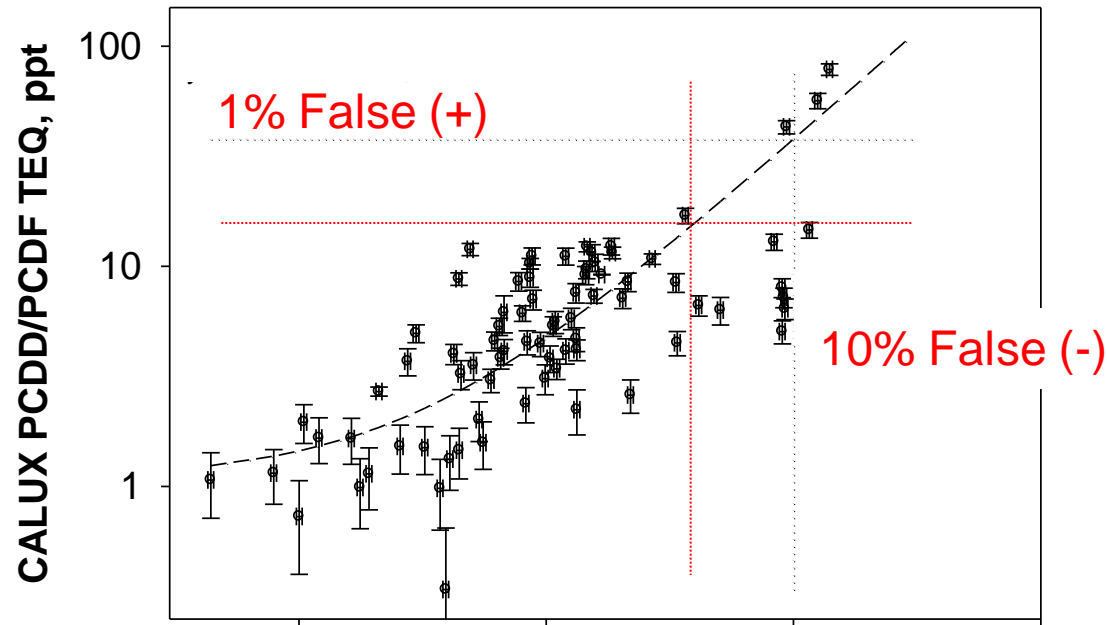

CALUX
BLS Regression Results
 $Y = 3.67x + 1.08$, $R = 0.59$

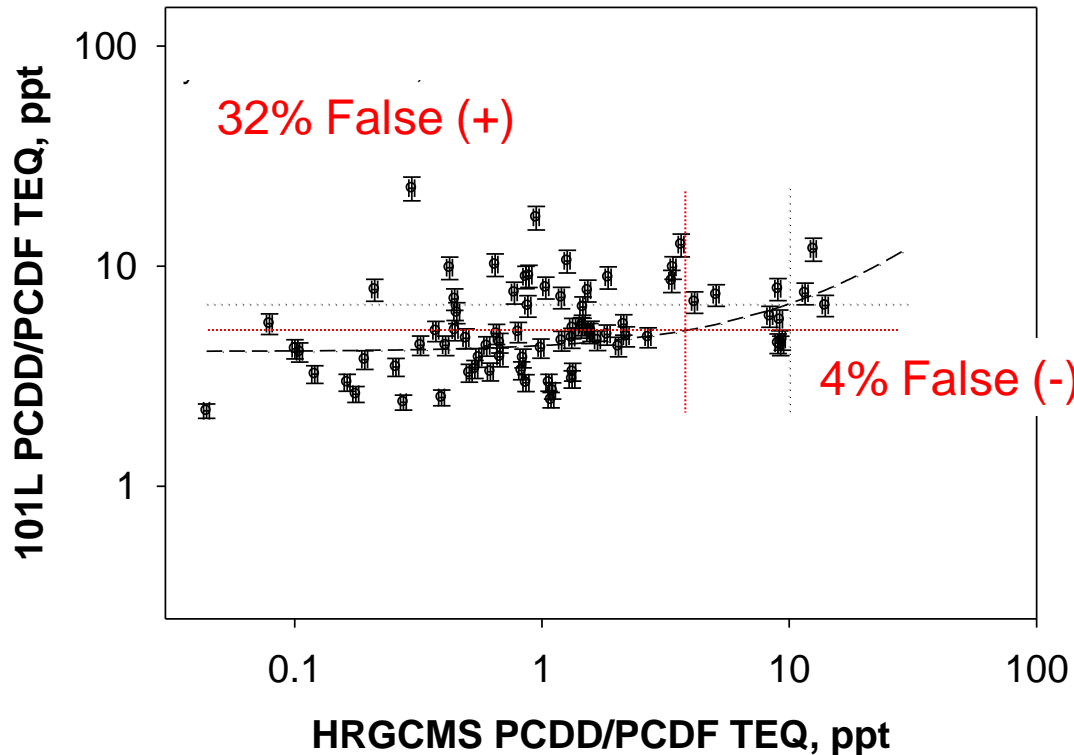

101-L
BLS Regression Results
 $Y = 0.265x + 4.09$, $R = 0.02$




Laboratory Duplicate Results


Sample ID	% fines	% organic carbon	CALUX		101L		HRGCMS	
			Results	RPD	Results	RPD	Results	RPD
CPS_3	55%	1.55	4.18	3%	5.23	13%	1.33	15%
QC_1 (CPS_3 split)		1.49	4.07		4.59		1.55	
HC_2	98%	3.65	8.54	19%	7.59	10%	0.774	125%
QC_2 (HC_2 split)		4.33	7.05		8.40		3.33	
NCPS_2	54%	0.640	5.35	90%	2.96	13%	1.07	15%
QC_3 (NCPS_2 split)		0.949	2.03		3.38		0.923	
PSPS_1	98%	2.31	7.16	5%	4.31	30%	2.04	73%
QC_4 (PSPS_1 split)		2.03	6.82		5.86		0.947	
SPSB_0	80%	2.24	9.68	57%	5.41	7%	1.46	8%
QC_5 (SPSB_0 split)		2.07	5.36		5.79		1.57	
average:			35%		15%		47%	

Laboratory Duplicate Results for Other Parameters

RPD for Field Split Samples vs. Percent Fines

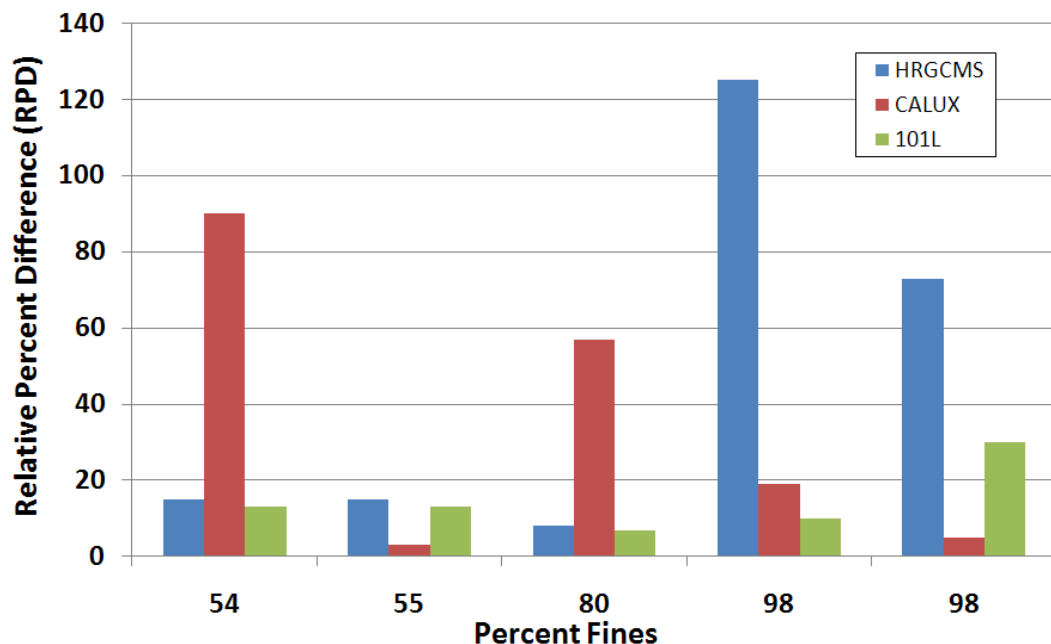

RPD for Field Split Samples vs. TOC

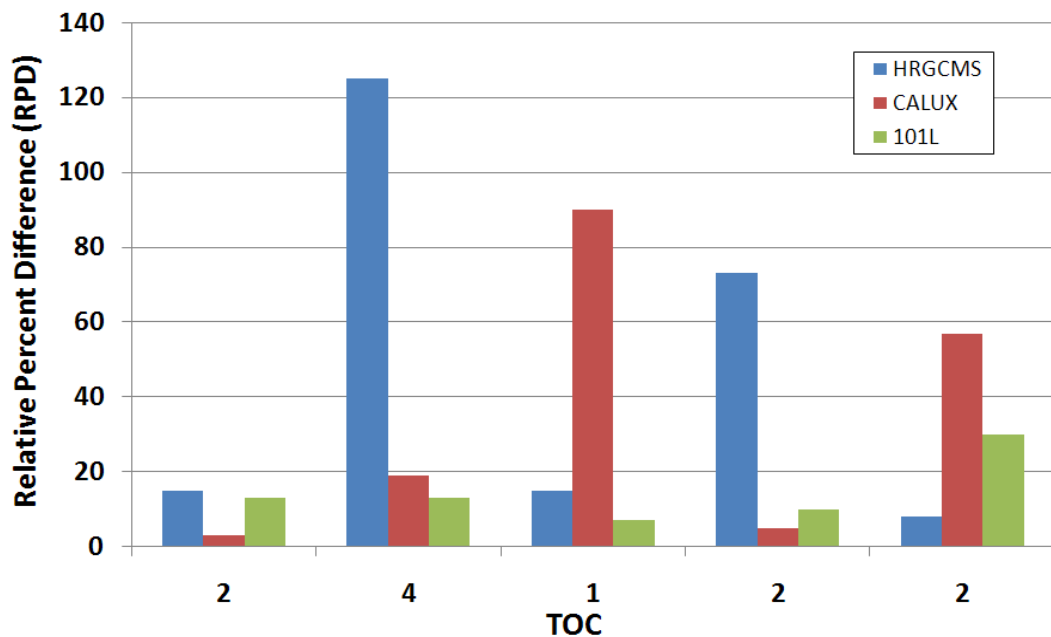



Results

Sample ID	HRGCMS	CALUX	101L
<i>FBA3-32-2*</i>	41.0	18.6 ✓	11.1 x
<i>T115-S1-CS-0803*</i>	19.2	88.7 ✓	6.06 x
<i>T115-S2-01-ZA-0803*</i>	31.5	71.0 ✓	18.2 ✓
<i>T115-S2-02-ZA-0803*</i>	24.1	104 ✓	12.5 x
<i>T115-S2-CS-0803*</i>	23.3	75.7 ✓	20.6 ✓
<i>T18-S1-C5*</i>	22.3	60.2 ✓	20.5 ✓
<i>PO-BA-25-SS-A*</i>	23.6	14.1 x	7.65 x
<i>PO-BA-25-SC-Z*</i>	67.2	16.3 ✓	13.4 x
<i>PO-UP-22-SC-A*</i>	40	11.4 x	9.61 x
<i>PO-UP-22-SC-B*</i>	28.2	3.90 x	18.7 ✓
<i>PO-UP-20-SC-A*</i>	39.2	15.4 ✓	12.6 x
<i>PO-UP-20-SC-B*</i>	54.1	8.64 x	11.9 x

67%

33%

notes

Urban samples are shown in italics

* Urban samples used for screening evaluation purposes only not included in regression or correlation analysis. Check marks indicate assay >15 ppt TEQ and x's indicate assay <15 ppt TEQ.

a. value was truncated to zero for correlation analysis

b. estimated value below lowest calibration standard concentration

c. estimated variance value for this datapoint was negative for 101L so it was not included in the analysis.



Discussion

- Assays performed well in the concentration range of interest
 - False positive errors for CALUX and 101-L < 27 percent
 - False negative errors for CALUX and 101-L < 10 percent
- RPDs indicate that sampling error may have contributed significantly to total error in this study
- Assays performed poorly for urban samples containing concentrations > 15 ppt TEQ; however, samples originated from separate studies
- Factors contributing to poor performance may include
 - Presence of co-contaminants
 - Proximity to known sources
 - Variations in sample percent moisture
 - Sample heterogeneity and differences in sample preparation
- Recommend assay performance be evaluated on site-specific basis considering uniformity of sediment, presence of co-contaminants and known sources



Acknowledgements

- Special thanks to Choo Yaw Ang, USACE ERDC, for assistance with laboratory analysis, development of variance information and general project support



US Army Corps of Engineers



6/16/2010

BUILDING STRONG_{SM}